

NETS_{eries}

AN **SCORTS** PRODUCT




Welcome to the next level of user-friendly operations and outstanding productivity.

Equipped with high-quality Mitsubishi engines, transmission with constant mesh technology & MITA make hydraulic lift, these machines deliver extra durability and reliability required for varied jobs. Whether you're mowing, landscaping or doing any other work in vineyard or orchard, the new COMPACT RANGE is the best choice for durability, versatility and comfort.

Powered by environment friendly 3-cylinder liquid cooled diesel engine*.

World renowned Mitsubishi family engines offer excellent power, high torque, cleaner emissions, low noise & vibration with higher fuel efficiency in 18-30 HP category.

*Latest Emission Compliant



POWERTRAIN


Mechanical

9F+3R gear speeds with constant mesh technology for smooth gear shifting and soundless operation, perfectly compatible with all types of operations. **Hydrostatic**

3 Range hydrostatic transmission with high performance, high reliability and quiet operation.

SIDE SHIFT GEAR LEVERS

Powertrain with side shift gear levers which provides ease of access, agility and hassle-free operation.

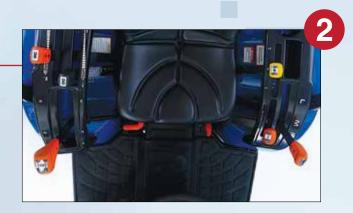



FLAT PLATFORM

Flat platform for more leg space which provides extra comfort to operator during long working hours.

TWIN PEDALS FOR HST

Twin HST pedals offer smooth forward and reverse, for smooth movement, acceleration and deceleration.






CRUISE CONTROL

Hydrostatic Powertrain with Cruise Control feature which maintains a constant speed without pressing the foot pedals, for more convenience.









HYDROSTATIC STEERING

Hydrostatic steering with excellent turning radius, which offers effortless manoeuvrability and reduces operator fatigue.





1DA STANDARD FITMENT







POWERFUL 3 POINT HITCH

3 point hitch with 750 kg lifting capacity can operate a wide range of implements for excellent performance and productivity.

POSITION AND DRAFT CONTROL LEVERS

Mechanical Powertrain with Automatic Draft & Depth Control (ADDC) for better sensing with draft implements. (Draft Control available only in Farmtrac 26 and Farmtrac 30)



9

REAR / MID PTO

Mechanical Powertrain – Dual Speed PTO (540/540E)

Hydrostatic Powertrain – Single Speed PTO (540)

Rear PTO is a standard feature for various applications in both Mechanical and Hydrostatic Powertrain.

Mid PTO is a standard feature with HST. This allows the use of various implements, including a mid-mount mower.

HIGH GROUND CLEARANCE

Designed with high ground clearance and heavy duty portable type front axle for greater traction during demanding applications.





PROJECTOR HEADLAMPS

Stylish design with adequate light spread to improve visibility, which increases safety of operator at night.

PARAMETERS	FARMTRAC 20 (2WD/4WD)	FARMTRAC 22 (2WD/4WD)	FARMTRAC 26 (2WD/4WD)	
ENGINE				
Emission Norms	Stage V	Stage V	Stage V	
Power at Rated ERPM, HP	18 HP	21 HP	24.5 HP	
Swept Volume (cc)	952	952	1318	
No. of Cylinders	3	3	3	
Air Cleaner Type	Dry Air Cleaner	Dry Air Cleaner	Dry Air Cleaner	
PTO				
PTO speed- Std.	540/540E	540/540E	540/540E	
TRANSMISSION				
Туре	Constant Mesh	Constant Mesh	Constant Mesh	
No. of Gears	9 Forward + 3 Reverse	9 Forward + 3 Reverse	9 Forward + 3 Reverse	
Differential Lock	Yes	Yes	Yes	
CLUTCH				
Type	Single Clutch	Single Clutch	Single Clutch	
BRAKES		<u> </u>	<u> </u>	
Type	Oil Immersed Brakes	Oil Immersed Brakes	Oil Immersed Brakes	
Hand Brake	Independent	Independent	Independent	
3-POINT LINKAGES	·	·	·	
Category	Cat 1 N	Cat 1 N	Cat 1 N	
HYDRAULICS				
Functions	Position Control	Position Control	Draft & Position Control	
Lift Capacity, Kg	750 Kg (at hitch point)	750 Kg (at hitch point)	750 Kg (at hitch point)	
Auxiliary Valve, Rear	1 Double Acting	1 Double Acting	1 Double Acting	
STEERING			<u> </u>	
Steering	Power Steering	Power Steering	Power Steering	
FRONT AXLE	Ü			
Front Axle	2WD/4WD	2WD/4WD	2WD/4WD	
TYRE				
Front Tyre	5.2x14/5x12	5.2x14/5x12	5.2x14/6x12	
Rear Tyre	8x18	8x18	8.3x20	
CAPACITIES (+/-2%)				
Fuel Tank capacity, Itrs.	24	24	24	
DIMENSIONS (+/-2%)				
Length, mm	2674	2674	2700	
Width, mm	1020	1020	1040	
Height, mm (Upto Beacon Light)	2160	2160	2190	
Wheelbase, mm	1420	1420	1550	
OTHER FEATURES				
Downdraft Exhaust I Battery Cut-off Switch I Operator Presence Switch				
OPTIONAL FEATURES				
	Industrial Tyres: 23x8.50-12 & 33x15.5-16.5 Turf Tyres: 23x8.50-12 & 33x15.5-16.5 Radial Tyres: 180/85D12 & 280/70R18 Mounted Heater Cabin			





PARAMETERS	FARMTRAC 26H (4WD)	FARMTRAC 30 (4WD)	FARMTRAC 30H (4WD)
ENGINE			
Emission Norms Power at Rated ERPM, HP Swept Volume (cc) No. of Cylinders	Stage V 24.5 HP 1318 3	Stage 3A 28.5 HP 1318 3	Stage 3A 28.5 HP 1318 3
Air Cleaner Type	Dry Air Cleaner	Dry Air Cleaner	Dry Air Cleaner
PTO PTO speed- Std. TRANSMISSION	Rear - 540 & Mid PTO	540/540E	Rear - 540 & Mid PTO
Type No. of Gears Differential Lock	Hydrostatic 3 Range Yes	Constant Mesh 9 Forward + 3 Reverse Yes	Hydrostatic 3 Range Yes
CLUTCH	Nint Amelian In	Oire alla Olestala	NI-+ AIIII-
Type BRAKES	Not Applicable	Single Clutch	Not Applicable
Type Hand Brake 3-POINT LINKAGES	Oil Immersed Brakes Independent	Oil Immersed Brakes Independent	Oil Immersed Brakes Independent
Category	Cat 1 N	Cat 1 N	Cat 1 N
HYDRAULICS	Cat i ii	out 114	out 114
Functions Lift Capacity, Kg Auxiliary Valve, Rear	Position Control 750 Kg (at hitch point) 1 Double Acting	Draft & Position Control 750 Kg (at hitch point) 1 Double Acting	Position Control 750 Kg (at hitch point) 1 Double Acting
STEERING			
Steering	Power Steering	Power Steering	Power Steering
FRONT AXLE	ALM D	AMP	ANAID
Front Axle	4WD	4WD	4WD
TYRE Front Tyre Rear Tyre CAPACITIES (+/-2%)	23×8.50-12 - Turf Tyres 33x15.5-16.5 - Turf Tyres	6x12 8.3x20	23×8.50-12 - Turf Tyres 33x15.5-16.5 - Turf Tyres
Fuel Tank capacity, Itrs.	24	24	24
DIMENSIONS (+/-2%)	∠ ₹	- 1	LT
Length, mm Width, mm Height, mm (Upto Beacon Light)	2700 1410 2170	2700 1040 2190	2700 1410 2170
Wheelbase, mm	1550	1550	1550
OTHER FEATURES	Downdraft Exhaust	Battery Cut-off Switch Opera	ator Presence Switch

Downdraft Exhaust I Battery Cut-off Switch I Operator Presence Switch

OPTIONAL FEATURES

Industrial Tyres: 23x8.50-12 & 33x15.5-16.5 | Agri Tyres: 6x12 & 8.3x20 | Radial Tyres: 180/85D12 & 280/70R18 | Mounted Heater Cabin | Mid Spool Valve & Joystick (In HST only)

NARROW WIDTH. LESS TURNING RADIUS.

DIFFERENT TYRE OPTIONS FOR VARIOUS APPLICATIONS.









COMPATIBLE WITH VARIOUS IMPLEMENTS LIKE





ROTAVATOR





ESCORTS AGRI MACHINERY, INTERNATIONAL BUSINESS DIVISION
Plot No. 2, Sector – 13, Faridabad (NCR), India, Phone: +91-129-2575507/5292

www.farmtrac.pl

Website: www.farmtracglobal.com | E-Mail: international@escorts.co.in | Follow us on: 👍 in 🧓 💟

Tel: +48 89 743-37-00 Fax: +48 89 743-37-01